

Crowd Alley



Specifications

- **Overall Dimensions:** 30' L x 3'6" W x 7' H
- **Materials:**
 - **Panel:** 1 1/2" x 16 gauge square with 42" high 16 gauge sheeting
 - **Frame:** 2 1/2" x .100 wall square
 - **Blocker:** 1 1/2" x 16 gauge round with 16 gauge sheeting
- **Configurations:**
 - Curved Alley: Inside - 7.5' / section
Outside - 10' / section
 - Straight Alley - Both - 10' / section
- **Paint:** Baked on powder coat paint
- **Weight (in pounds):** Curved 1622; Straight 1704
- **Warranty:** 1 year

Highlighted Features & Advantages


- Can be configured in left or right hand C or S curve with no additional components.
- Panels are 7' tall while the lower height sheeting provides access to the cattle without a catwalk
- Panels suspended above the ground so they do not bind up with mud or snow
- Panels are sealed with silicone to reduce noise and rusting
- "Butterfly" hinge system allows for quick and easy one-handed width adjustment from 18" to 30"
- Overhead backstops adjust for all sizes of cattle to safely prevent cattle from backing up in the alley
- A straight alley is also available
- Fixed panels can be opened quickly in emergency situations

Suggested Applications

- All cattle operations

Crowd Alley

Parts List

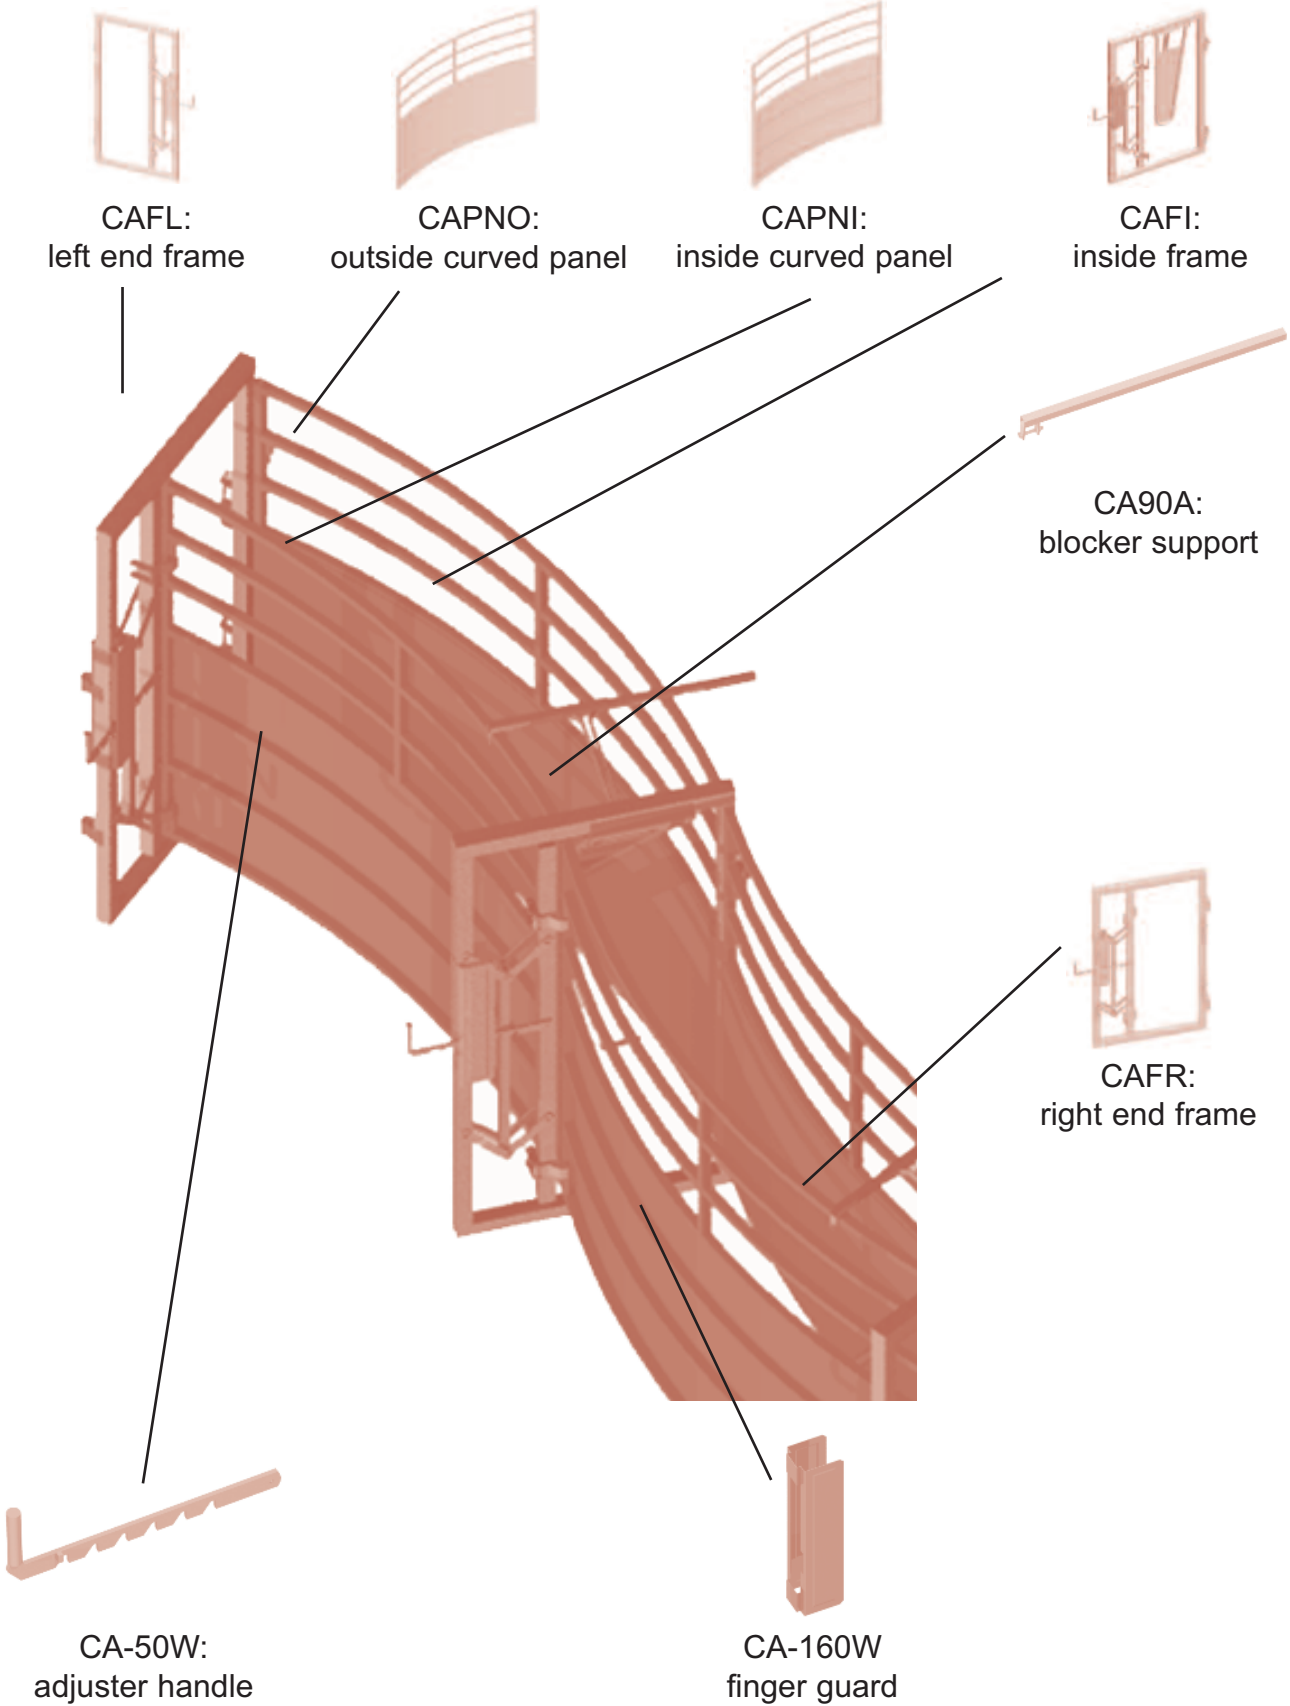

Crowd Alley

Center Frame Assembly Parts List

