


Flex PG4

Available in 10' & 12' lengths

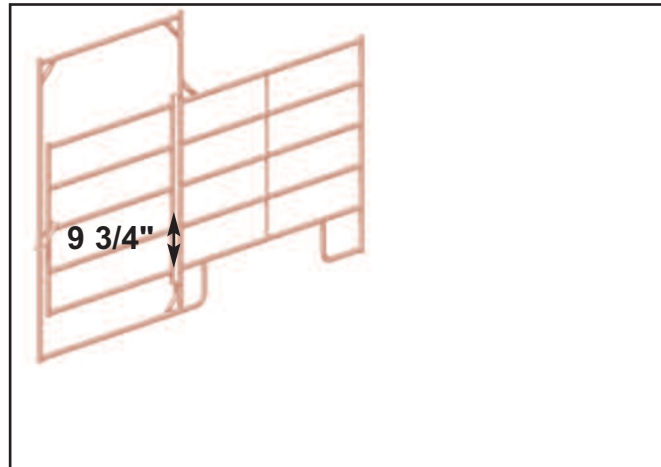

Specifications

- **Posts:** 1 1/8" x 1 3/4" x 16 gauge oval, capped with rubber plugs
- **Rails:** 1 1/8" x 1 3/4" x 16 gauge oval
- **Braces:** 1" x 16 gauge round tubing, notched & welded
- **Panel Height:** 72"
- **Gate Frame Height:** 84"
- **Length:** Sliding Rod
- **Connectors:** Patented Hi-Density Molecular Rubber with UV Inhibitors
- **Paint:** Baked on powder coat paint
- **Weight (in pounds):** 6 rail: 12' - 119
- **Warranty:** 1 year on panel, 3 years on flex connectors
- **Steel:** 1017 carbon steel rated at 58,000 psi

Highlighted Features & Advantages

- Flex connectors absorb impact, increasing safety
- Less than 1" gap between panels
- Easy to operate latch

Suggested Applications

- Round pens
- Temporary stalls
- Perimeter fencing
- Light confinement