


# Range Panels

Available in 10', 12' & 16' lengths



U-latch connector

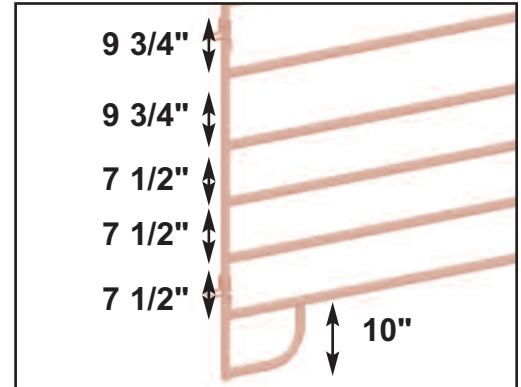

Optional 3-way connector

## Specifications

- **Height:** 63"
- **Posts:** 1 1/8" x 1 3/4" x 16 gauge oval, capped with rubber plugs
- **Rails:** 1 1/8" x 1 3/4" x 16 gauge oval
- **Braces:** 1" x 16 gauge round, notched & welded
- **Rail Spacing:** 6 rails with 9 3/4" (top 2 spaces), 7 1/2" (bottom 3 spaces)
- **Connectors:** Universal U-Latch
- **Paint:** Baked on powder coat paint
- **Weight (in pounds):** 10' - 78, 12' - 90, 16' - 116
- **Warranty:** 1 Year
- **Steel:** 1017 carbon steel rated at 58,000 PSI

## Highlighted Features & Advantages



- Secure, versatile connector is flexible on uneven ground
- Improved cattle flow with narrow bottom rail spacing
- Mud legs for added support & extended life
- Oval tubing provides increased strength with less material
- Notched vertical bracing for overall strength
- Square corners prevent animals' leg from slipping between panels

## Suggested Applications


- Cattle and horses in light confinement
- Temporary stalls
- Perimeter fencing
- Roping arenas
- Round pens

# Range Panels

## Parts List

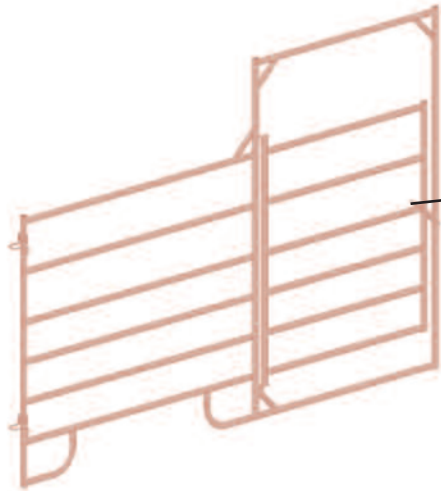

RP-15:  
latch

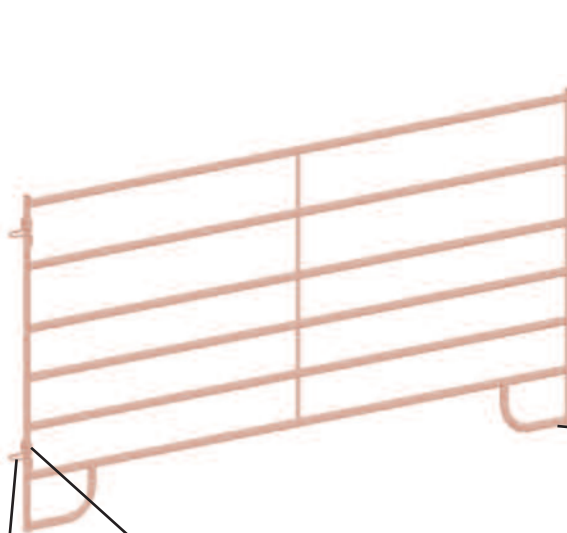

OVLCAP:  
oval rubber cap  
on both posts



RP-3:  
panel leg



RP55W:  
standard hoop



RP52:  
slide tube



RPHOOP:  
optional 3-way hoop

optional  
4-way hoop